

# JRC-OV-K1-SIP-001-S

## SIP SERIES-Mini Outdoor Station 1-Button


### Key Characteristics

#### Basic Function

- Support SIP protocol
- Support IC card unlock
- Adjustable unlock time
- Door status detection and timeout alarm
- Support online update
- 2 lock management



### Typical Topology

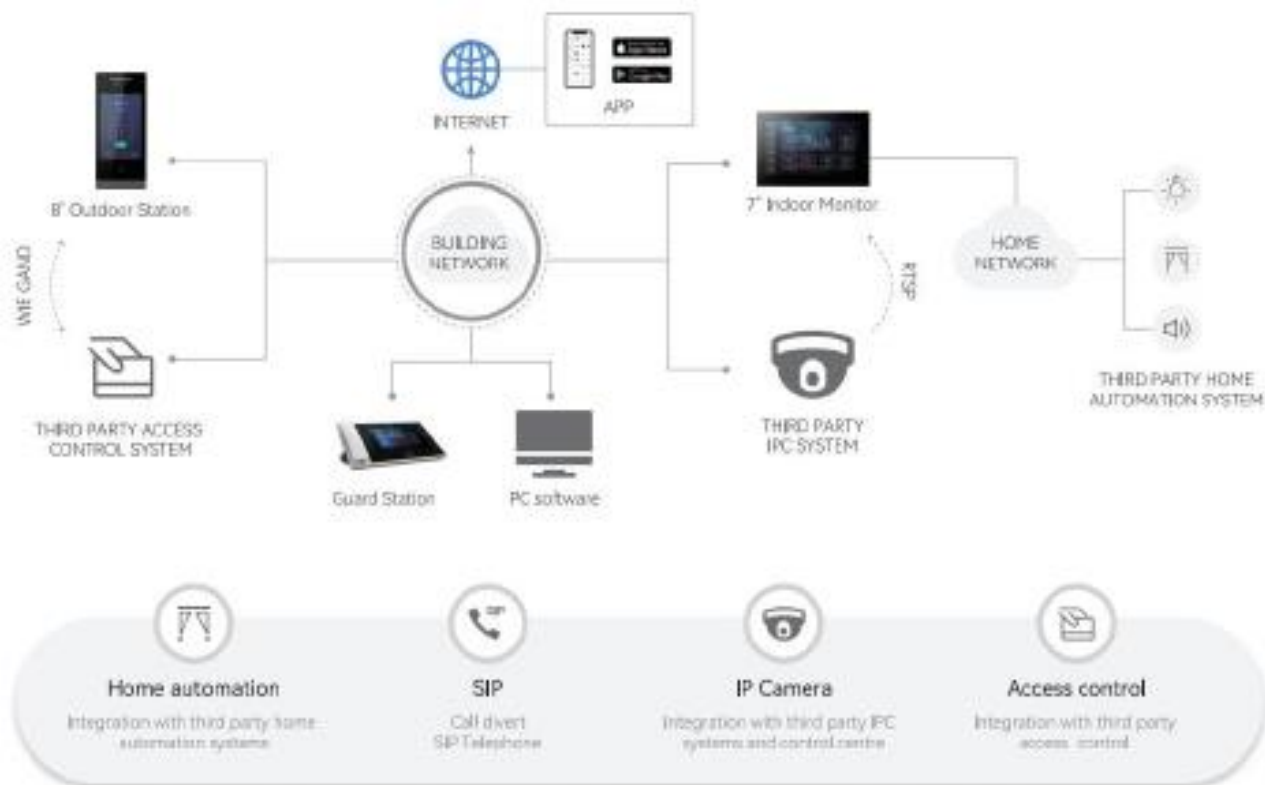



## Specifications

<b>Model</b>		JRC-OV-K1-SIP-001-S	
<b>System Parameters</b>	<b>Processor</b>	High-Performance Embedded SOC Processor	
	<b>Operation system</b>	Embedded Linux Operation System	
<b>Video Parameters</b>	<b>Camera</b>	CMOS 2 MP HD Colorful Camera	
	<b>Video compression standard</b>	H.264	
	<b>Resolution</b>	1024*720	
	<b>Video frame rate</b>	15 fps	
<b>Audio Parameters</b>	<b>Audio input</b>	Built-in Omnidirectional Microphone	
	<b>Audio output</b>	Built-in Loudspeaker	
	<b>Audio compression standard</b>	G.711 A	
	<b>Audio sample Rate</b>	16K16 Bit	
	<b>Audio quality</b>	Noise Suppression and Echo Cancellation	
<b>Access Control Parameters</b>	<b>Internal card reader</b>	Built-in IC Card Reader	
	<b>Exit button</b>	Exit Button for Opening the Door	
	<b>Door magnetic detection</b>	Detects Door Magnetic Status	
<b>Light Supplement</b>	<b>Light supplement mode</b>	LED Supplement	Visible Light Supplement
<b>Network Parameters</b>	<b>Ethernet</b>	10/100 Mbps Self-Adaptive Ethernet	
	<b>Network protocol</b>	TCP/IP, UDP,SIP,HTTP, HTTPS, FTP,RTSP, RTP	
<b>Alarm Parameters</b>	<b>Alarm input</b>	Door Magnetic Alarm, Tampering Alarm	
<b>Device Interfaces</b>	<b>Network interface</b>	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface	
	<b>I/O output</b>	Door lock, Door status detection	
	<b>Material</b>	Aluminium faceplate	
	<b>Power supply</b>	DC 24V	
	<b>Power consumption</b>	≤12 W	
	<b>Working temperature</b>	-20° C to +55° C (-4° F to 131° F)	
	<b>Working humidity</b>	10% to 90%	
	<b>IP protection level</b>	IP54	
	<b>Dimensions (L × W × H)</b>	120mm × 194 mm × 44.7mm	
	<b>Certification</b>	CE. ROHS	

# Appearance and Interfaces

