



# JRC-IA-S14-W

Audio Telephone for IP IntercomSystem

## Key Characteristics

### Basic Information


- Support 24V non-standard POE power supply or additional DC24V power supply
- Support doorbell and SOS alarm function
- Support one apartment with more than one Indoor Station
- Support audio intercom between visitors and residents, residents and Guard Units
- Support audio intercom between any two apartments, but this product can only be called

### Audio Function

- Can receive calls from the outdoor station and guard unit



## Typical Topology

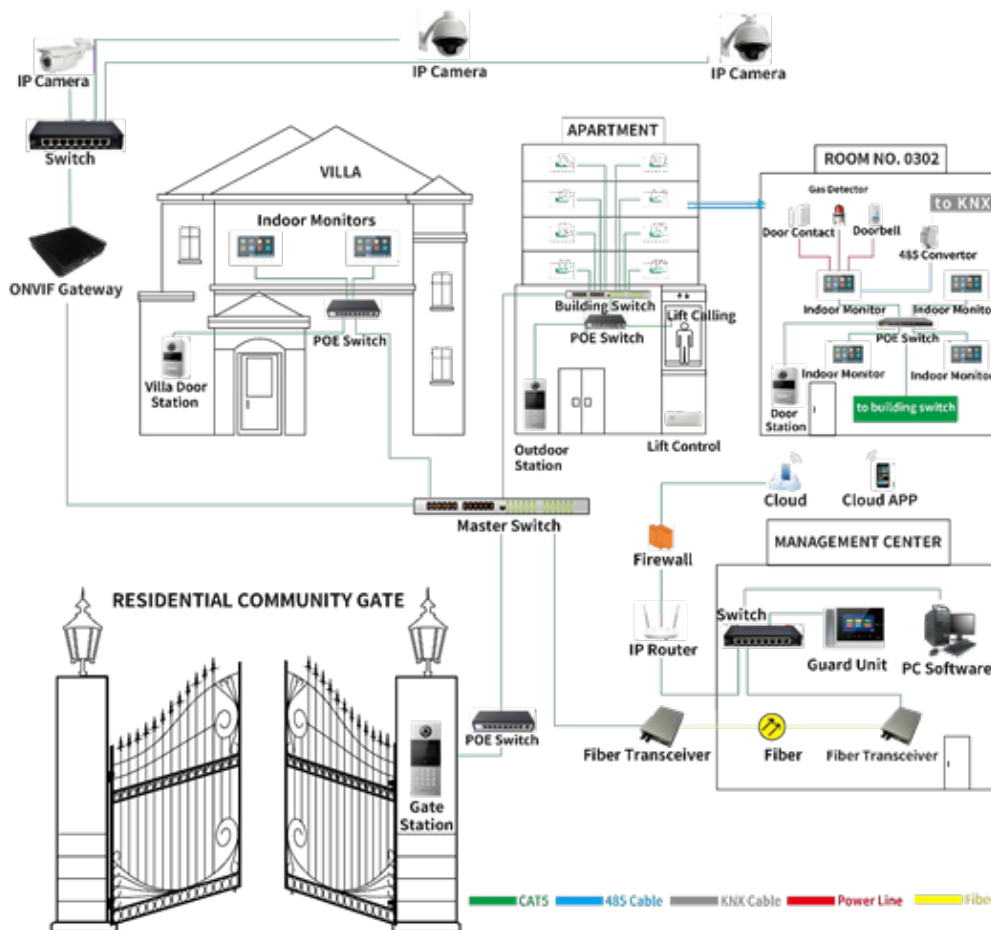






# Parameters



Model	Model Number	JRC-IA-S14W
System Parameters	Processor	High-Performance Embedded SOC Processor
	Operation system	Embedded Linux Operation System
Audio Parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio compression standard	G.711 A
	Audio compression rate	64 Kbps
	Audio quality	Noise Elimination and Echo Cancellation
Network Parameters	Ethernet	10/100 Mbps SelfAdaptive Ethernet
	Network protocol	TCP/IP, UDP
Device Interfaces	Network interface	1 RJ-45 10/100 Mbps SelfAdaptive Ethernet Interface
	RS485	No
	I/O output	Unlock button
General	Power supply	24V Power Over Ethernet
		DC 24V
	Power consumption	<10 W
	Working temperature	-10° C to + 55° C (14° F to 131° F)
	Working humidity	10% to 90%
	Dimensions (L xW xH)	209.9x77.9 x52.8mm
	Certification	CE, ROHS



## Appearance and Interfaces

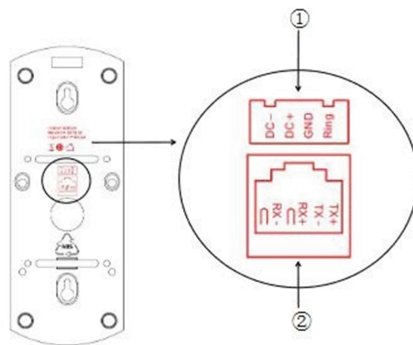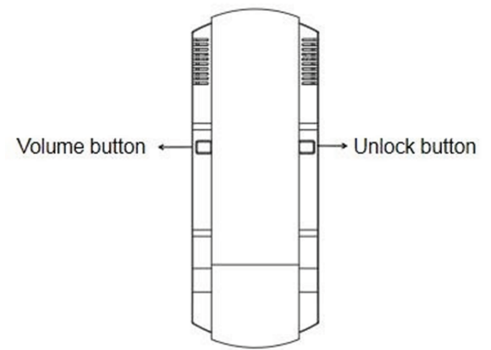

Index	Description
1	Speaker
2	Microphone
3	Volume Button
4	Unlock Button
5	Power Input 24V DC
6	RJ45 port for PoE Switch